> ? @ A B

Specifcation of products

> ? C D E F G H I J K L

3 4 5 6 7 8 9 : ; < =

!"#$%&' (!$)$&' ("*$+,&-.+/,0 +,12)/-1

M N O 3 4 P Q R S T U V
e f O Y Z[\]^_Zad[\a _`a[Z\]
W X O Y Z[\]^_`aaa]Z
b c O _d_ZZZ

g h		i j

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j (℃)	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean for ward current	180° half sine wave 50Hz Single side cooled, T_C=100°C	150			200	A
$I_{F(RMS)}$	RMS for ward current	Single side cooled, T_C=100°C	150			314	A
V_{RRM}	Repetitive peak reverse voltage	V_{RRM} tp=10ms V_{RSM}= V_{DRM}+V_{RRM}+200V	150		4000		V

K AK

150

Rating and Characteristic

Fig. 1

Fig. 2

Fig. 3

Fig. 4

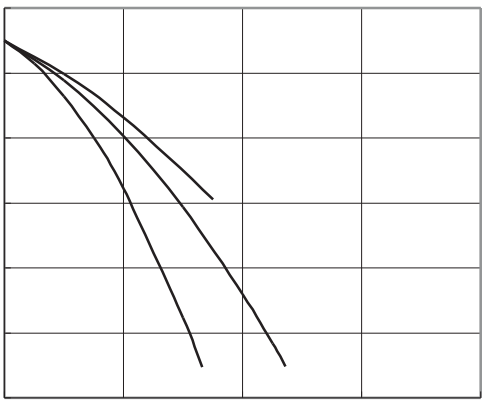

Fig. 5

Fig. 6

Outside Dimension

